

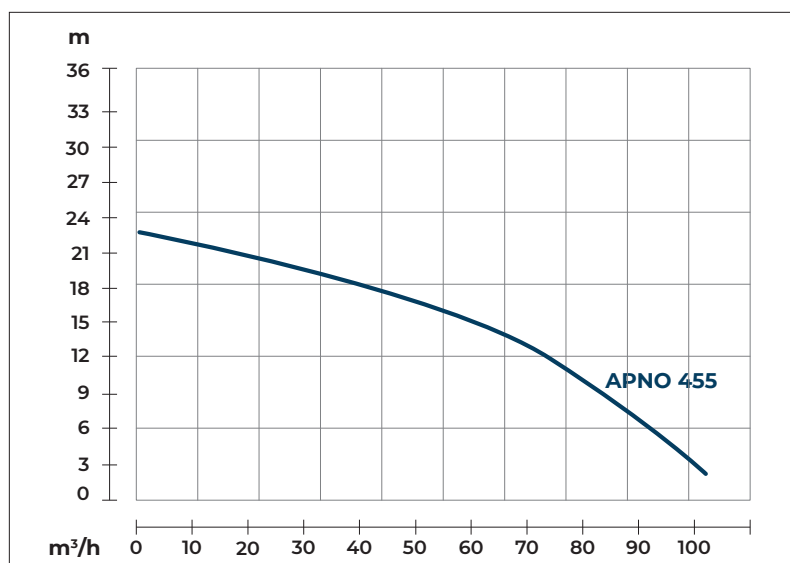


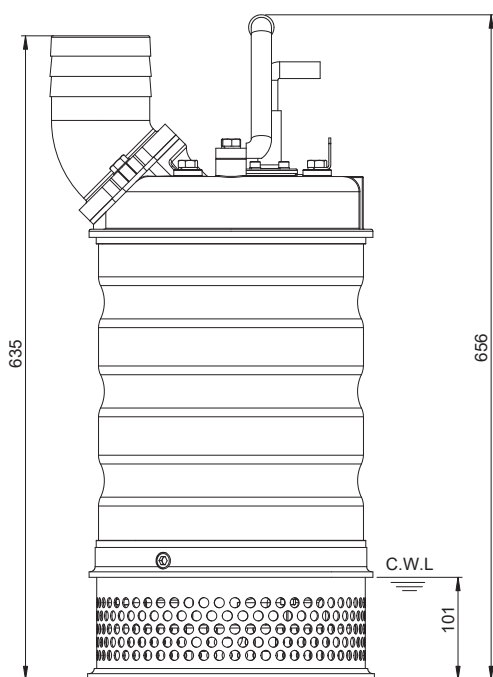

Shaft Speed : 2850 rpm

Solid Passage : 10 mm

Outlet : 100mm, 4in

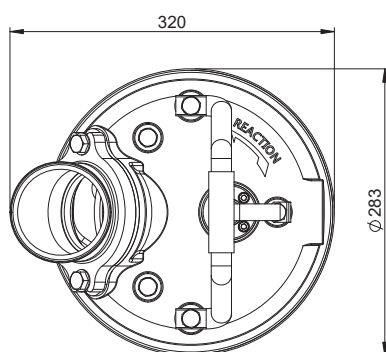

Weight : 60kg / 132 lbs

OUTPUT

5.5 kW

7.5 HP

HEAD

Rated : 15m, 49ft

Max : 22.5m, 74ft

FLOW

Rated : 16.7 l/s, 264 gpm

Max : 29.1 l/s, 462 gpm

Pump Type		Electric Submersible Pumps
		3-Phase
Motor	Type	Induction Motor
	Poles	2 Pole
	Insulation	Class F
	Protector	Circle Thermal Protector
	Starter	D.O.L.
Lubricant		Food Grade (ISO VG32)
Impeller Type		Opened
Shaft Seal		Double Mechanical Seal
		Silicon Carbide VS Ceramic / Carbon
Bearings		C3 Shielded ball bearings
Cable		H07BQF
		Length: 20m (66ft) or longer upon request.
Materials	Pump Casing	Gray Iron
	Impeller	Chromium Iron
	Motor Frame	Stainless Steel
	Motor Shaft	Stainless Steel
	Strainer	Stainless Steel
Max. Liquid Temperature		104°F (40°C)
Max. Submersion Depth		66ft (20m)
pH Range		pH 5 - pH 8