

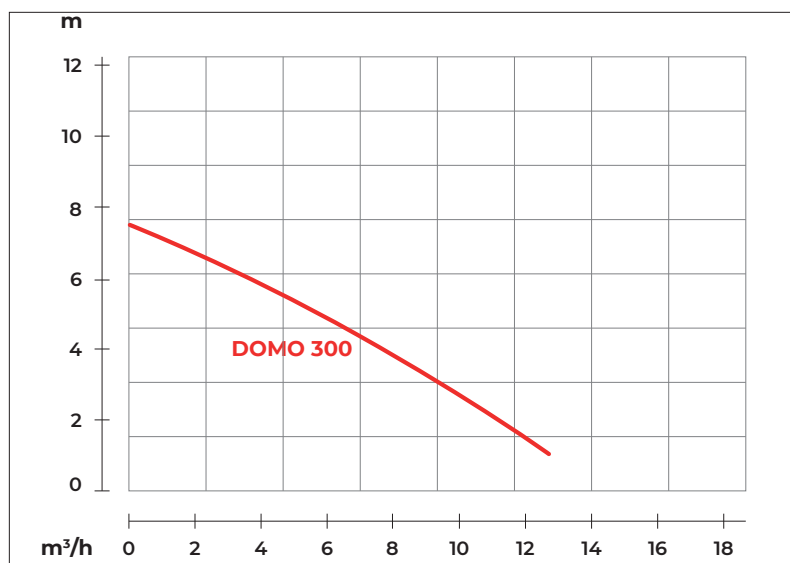


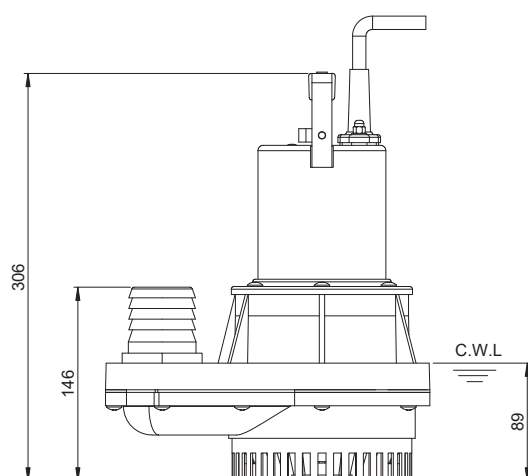

Shaft Speed : 2850 rpm

Solid Passage : 6 mm

Outlet : 50mm, 2in

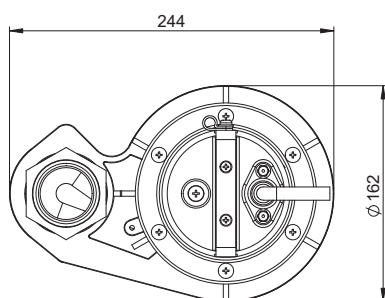

Weight : 4kg / 8.8 lbs

OUTPUT	HEAD	FLOW
0.25 kW	Rated : 5m, 16ft	Rated : 1.5 l/s, 24 gpm
0.33 HP	Max : 7.5m, 25ft	Max : 3.3 l/s, 53 gpm

Pump Type		Electric Submersible Pumps
		1-Phase
Motor	Type	Induction Motor
	Poles	2 Pole
	Insulation	Class F
	Protector	Miniature Thermal Protector
	Starter	Capacitor-Run
Lubricant		Food Grade (ISO VG115)
Impeller Type		Vortex
Shaft Seal		Single Mechanical Seal
		Ceramic / Carbon
Bearings		C3 Shielded ball bearings
Cable		H07RNF
		Length: 10m (33ft) or longer upon request.
Materials	Pump Casing	Plastic
	Impeller	Techno-polymer
	Motor Frame	Stainless Steel
	Motor Shaft	Stainless Steel
	Stainer	Plastic
Max. Liquid Temperature		104°F (40°C)
Max. Submersion Depth		66ft (20m)
pH Range		pH 5 - pH 8