

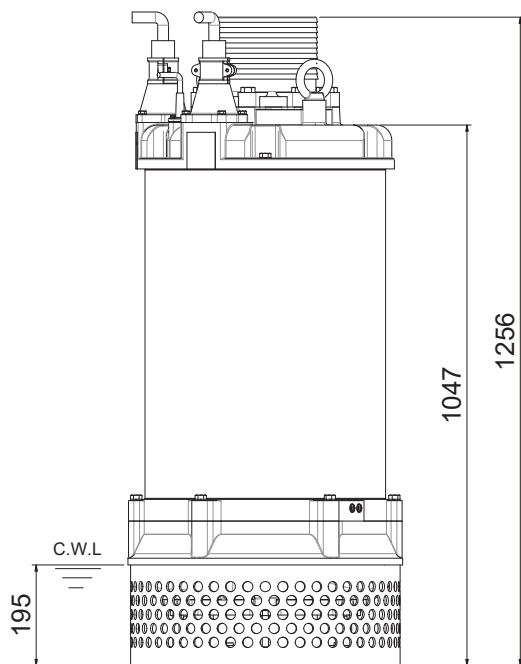


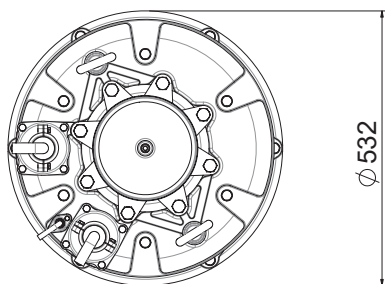

Weight : 510kg / 1124lbs

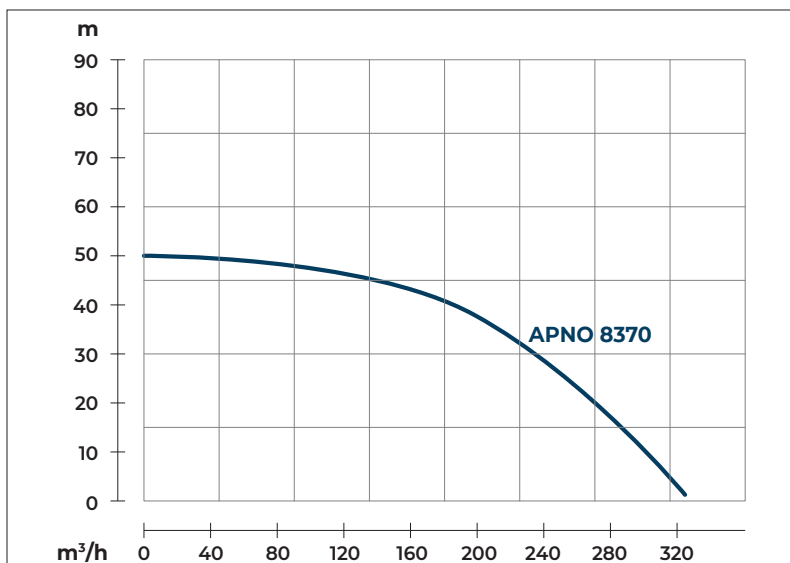

Shaft Speed : 2850 rpm

Solid Passage : 20 mm

Outlet : 200mm, 8in

OUTPUT	HEAD	FLOW
37 kW	Rated : 40m, 131ft	Rated : 60 l/s, 950 gpm
50 HP	Max : 50m, 164ft	Max : 91.6 l/s, 1452 gpm

Pump Type		Electric Submersible Pumps
		Three Phase
		IP 68
Motor	Type	Induction Motor
	Poles	2 Pole
	Insulation	Class F
	Protector	D.O.L. · Circle Thermal Protector, Star-Delta · Miniature Thermal Protectors
	Starter Method	D.O.L. · Star-Delta
Lubricant		Food Grade (ISO VG32)
Impeller Type		Closed
Shaft Seal		Double Mechanical Seal
		Silicon Carbide VS Ceramic / Carbon
Bearings		C3 Shielded ball bearings
Cable		H07BQF
		Length: 20m (66ft) or longer upon request.
Materials	Pump Casing	Ductile Iron
	Impeller	Chromium Iron
	Motor Frame	Gray Iron
	Motor Shaft	Stainless Steel
Outer Cover		Carbon Steel
Strainer		Carbon Steel
Max. Liquid Temperature		40°C (104°F)
Max. Submersion Depth		20m (66ft)
pH Range		pH 5 - pH 8