


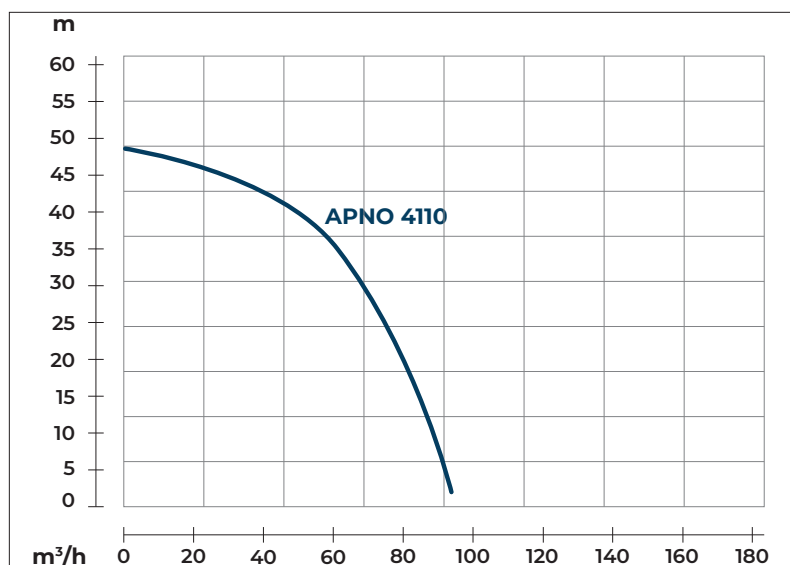

Shaft Speed : 2850 rpm

Solid Passage : 15 mm

Outlet : 100mm, 4in

OUTPUT

HEAD

FLOW

11 kW


Rated : 30m, 99ft

Rated : 16,7 l/s, 264 gpm


15 HP

Max : 48.5m, 159ft

Max : 24.2 l/s, 383 gpm

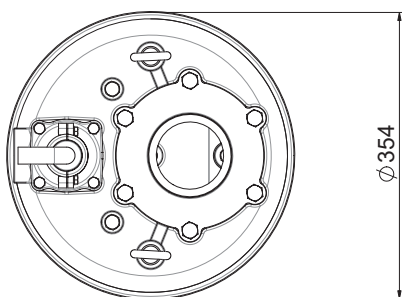

Ø 354

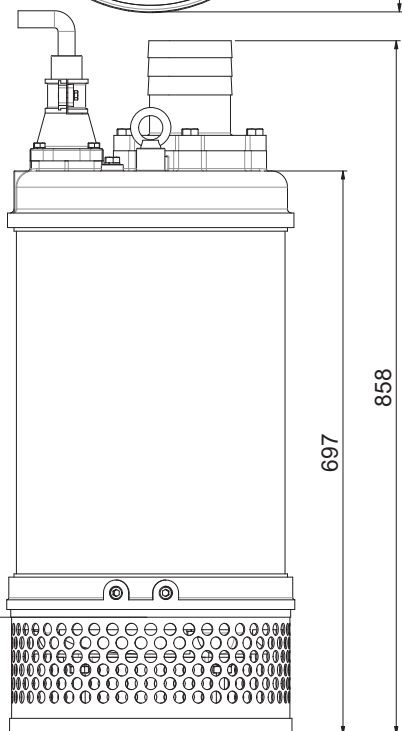

858

697

C.W.L

145

Weight : 135kg / 298 lbs

Pump Type		Electric Submersible Pumps
		3-Phase
Motor	Type	Induction Motor
	Poles	2 Pole
	Insulation	Class F
	Protector	Circle Thermal Protector
	Starter	D.O.L.
Lubricant		Food Grade (ISO VG32)
Impeller Type		Opened
Shaft Seal		Double Mechanical Seal
		Silicon Carbide VS Ceramic / Carbon
Bearings		C3 Shielded ball bearings
Cable		H07BQF
		Length: 20m (66ft) or longer upon request.
Materials	Pump Casing	Gray Iron
	Impeller	Chromium Iron
	Motor Frame	Gray Iron
	Motor Shaft	Stainless Steel
	Strainer	Stainless Steel
Max. Liquid Temperature		104°F (40°C)
Max. Submersion Depth		66ft (20m)
pH Range		pH 5 - pH 8