


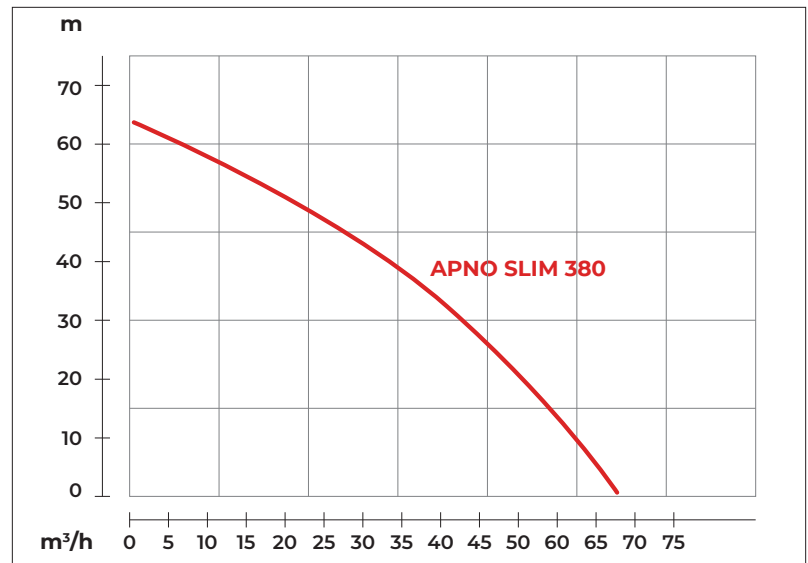

Shaft Speed : 2850rpm

Solid Passage : 8mm

Outlet : 80mm, 3in

OUTPUT

HEAD

FLOW

8 kW



Rated : 40m, 131ft

Rated : 10 l/s, 158 gpm

11 HP

Max : 65m, 213ft

Max : 18.3 l/s, 290 gpm

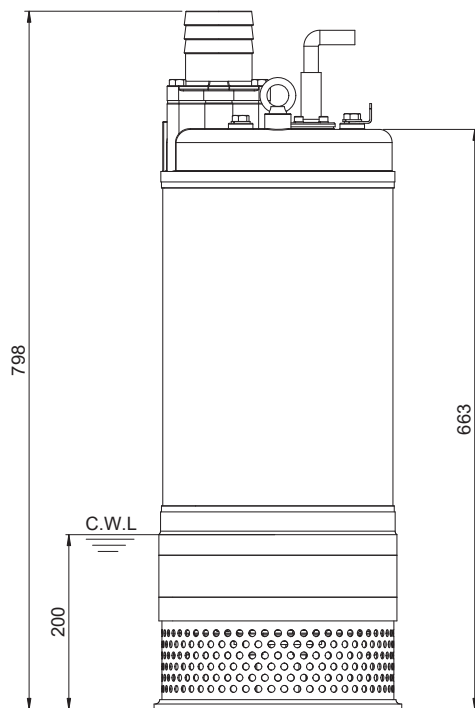

Weight : 92kg / 202.4lbs

Pump Type		Electric Submersible Pumps
		Three Phase
		IP 68
Motor	Type	Induction Motor
	Poles	2 Pole
	Insulation	Class F
	Protector	Circle Thermal Protector
	Starter Method	D.O.L.
Lubricant		Food Grade (ISO VG32)
Impeller Type		Opened · Dual impellers
Shaft Seal	Double Mechanical Seal	
	Silicon Carbide VS Ceramic / Carbon	
Bearings		C3 Shielded ball bearings
Cable		H07BQF
		Length: 20m (66ft) or longer upon request.
Materials	Pump Casing	Gray Iron
	Impeller	Chromium Iron
	Motor Frame	Stainless Steel
	Motor Shaft	Stainless Steel
Outer Cover		Stainless Steel
Strainer		Stainless Steel
Max. Liquid Temperature		40°C (104°F)
Max. Submersion Depth		20m (66ft)
pH Range		pH 5 - pH 8