


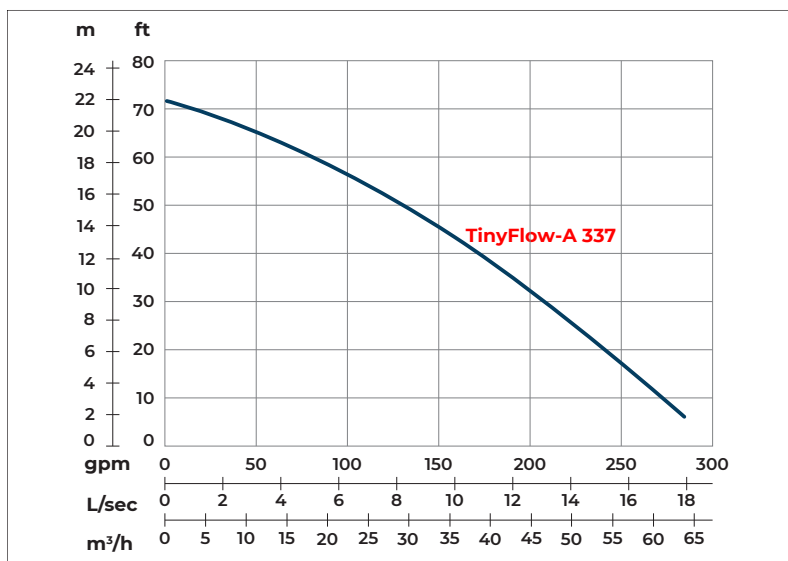

Shaft Speed : 2850 rpm

Solid Passage : 13 mm

Outlet : 80mm, 3in

OUTPUT

3.7 kW

5 HP

HEAD



Rated : 15m, 49ft

Max : 22m, 72ft

FLOW

Rated : 8.3 l/s, 132 gpm

Max : 17.5 l/s, 277 gpm

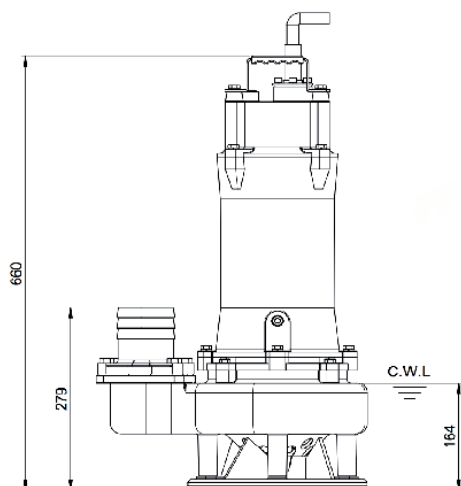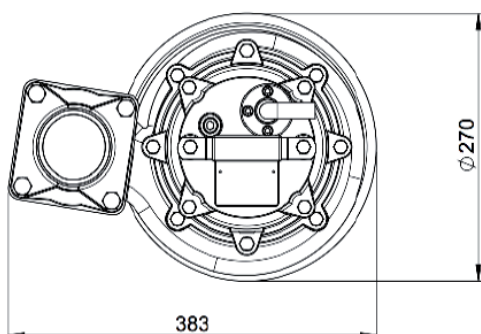

Weight : 57kg / 117lbs

Pump Type		Electric Submersible Pumps
		3-Phase
Motor	Type	Induction Motor
	Poles	2 Pole
	Insulation	Class F
	Protector	Circle Thermal Protector
	Starter Method	D.O.L.
Lubricant		Food Grade (ISO VG32)
Impeller Type		Vortex
Shaft Seal		Double Mechanical Seal
		Silicon Carbide VS Ceramic / Carbon
Bearings		C3 Shielded ball bearings
Cable		H07RNF
		Length: 10m (33ft) or longer upon request.
Materials	Pump Casing	Gray Iron
	Impeller	Gray Iron
	Motor Frame	Gray Iron
	Motor Shaft	Stainless Steel
	Agitator	Ductile iron
Max. Liquid Temperature		40°C (104°F)
Max. Submersion Depth		20m (66ft)
pH Range		pH 5 - pH 8