






HABERMANN AURUM
PUMPEN

APNO SLIM 330

High Chrome Dewatering Pump

50 Hz

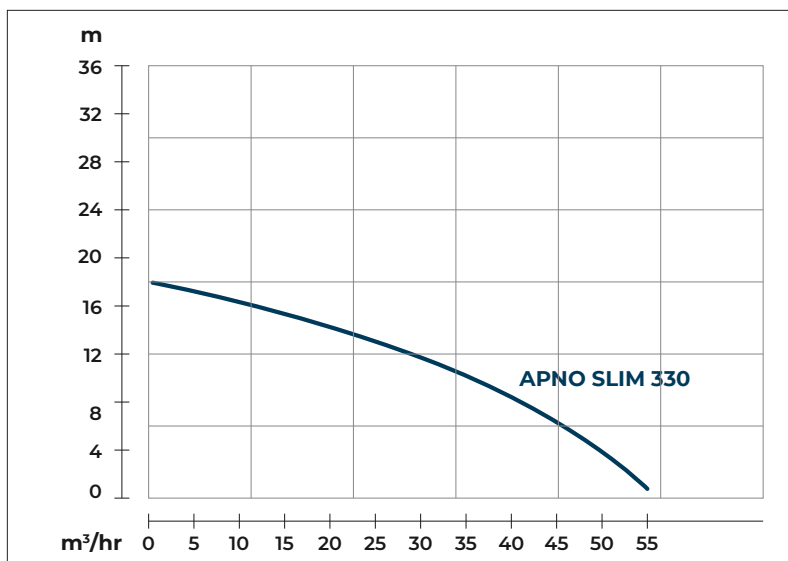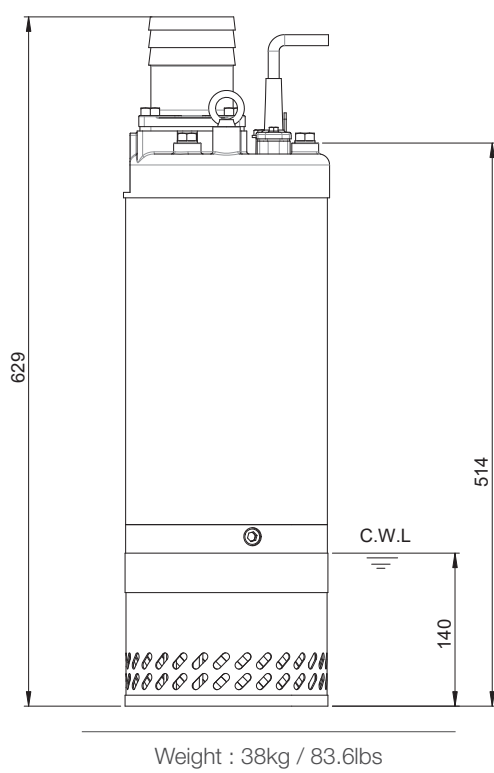

Shaft Speed : 2850 rpm

Solid Passage : 7 mm

Outlet : 80mm, 3in

OUTPUT	HEAD	FLOW
3 kW	Rated : 12m, 39ft	Rated : 8.3 l/s, 132 gpm
4 HP	Max : 18m, 59ft	Max : 15.0 l/s, 238 gpm

Pump Type		Electric Submersible Pumps
		Three Phase
		IP 68
Motor	Type	Induction Motor
	Poles	2 Pole
	Insulation	Class F
	Protector	Circle Thermal Protector
	Starter Method	D.O.L.
Lubricant		Food Grade (ISO VG32)
Impeller Type		Closed
Shaft Seal	Double Mechanical Seal	
	Silicon Carbide VS Ceramic / Carbon	
Bearings		C3 Shielded ball bearings
Cable	H07BQF	
	Length: 20m (66ft) or longer upon request.	
Materials	Pump Casing	Gray Iron
	Impeller	Chromium Iron
	Motor Frame	Stainless Steel
	Motor Shaft	Stainless Steel
Outer Cover		Stainless Steel
Strainer		Stainless Steel
Max. Liquid Temperature		40°C (104°F)
Max. Submersion Depth		20m (66ft)
pH Range		pH 5 - pH 8