




HABERMANN AURUM
PUMPEN

SENTINO LIGHT RW 400

Residue Pump

50 Hz


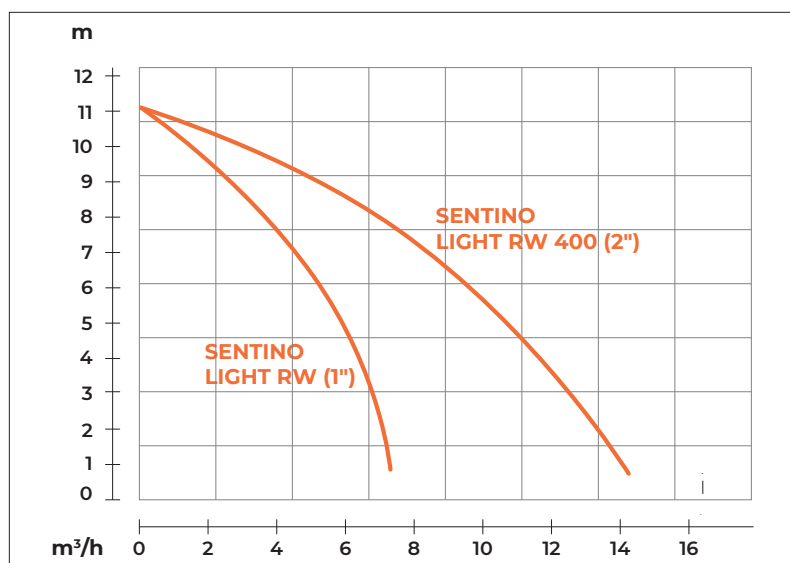


Shaft Speed : 2850 rpm

Solid Passage : 2 mm

Outlet : 25mm, 1in

Outlet : 50mm, 2in

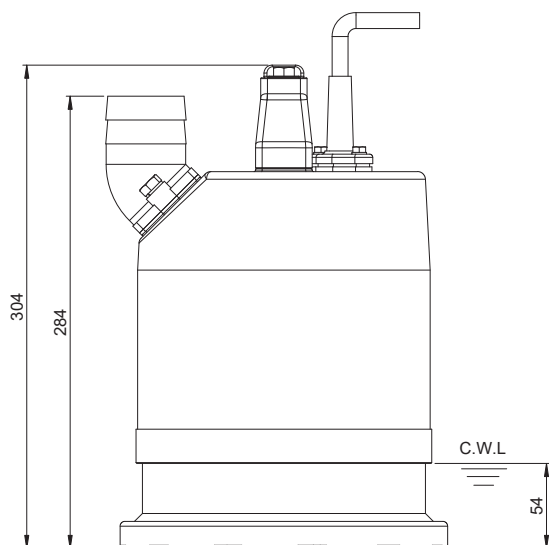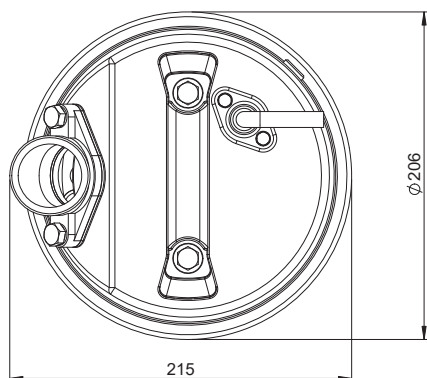

Weight : 10.5kg / 23.1lbs

OUTPUT

0.4 kW

0.5 HP

HEAD

Rated : 7m, 23ft

Max : 11m, 36ft

FLOW

Rated : 2 l/s, 37 gpm

Max : 4 l/s, 63 gpm

Pump Type		Electric Submersible Pumps
		1-Phase
		IP 68
Motor	Type	Induction Motor
	Poles	2 Pole
	Insulation	Class F
	Protector	1-Phase · Miniature Thermal Protector
	Starter Method	1-Phase · Capacitor-Run
Lubricant		Food Grade (ISO VG32)
Impeller Type		Opened
Shaft Seal		Double Mechanical Seal
		Silicon Carbide VS Ceramic / Carbon
Bearings		C3 Shielded ball bearings
Cable		H07RNF
		Length: 10m (33ft) or longer upon request.
Materials	Pump Casing	Gray Iron
	Impeller	Urethane Rubber
	Motor Frame	Aluminum
	Motor Shaft	Stainless Steel
	Outer Cover	Aluminum
	Bottom Plate	Synthetic Rubber
Max. Liquid Temperature		40°C (104°F)
Max. Submersion Depth		20m (66ft)
pH Range		5-8